

VULCASCOT LACING CORD

PVC COATED NYLON BRAID Produced to DEF. STAN 40-8/3



Vulcascot lacing cords are specifically designed for the lacing of cable forms.

The nylon braided core ensures high tensile strength with minor extensions but has sufficient elasticity under low loads to make a neat cable form.

The outer P.V.C. sheath acts as a cushion preventing the cord from cutting into the cable insulation and prevents rattling.

There is a maximum limit on tensile strength to prevent excessive tension in lacing up.

The braiding core stops any possibility of the lacing cord unwinding under tension.

Temperature Range: 40°C to 85°C


Tropical Resistance

Humidity Class H5.

Properties maintained after more than 21 days of tropical testing.

Does not support mould growth

For further information please contact
Vulcascot Cable Protectors Limited
Tel: 0800 0352842 Fax: 01604 632344
Sales@vulcascotcableprotectors.co.uk
www.vulcascot.co.uk

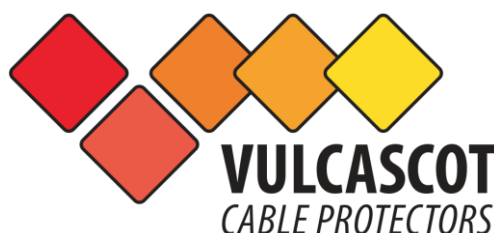

Technical Data

Properties	VUL 88	VUL 173
Outside diameter	1.0mm to 1.2mm	0.75mm to 00.85mm
Working load	6.75 kg tested for 5 mins. without breaking	4.5 kg tested for 5 mins without breaking
Ultimate tensile strength	16 kg typical	11 kg typical
Extensibility	At R.T. max. elongation 6.75 kg load is 15%	At R.T. max. elongation 4.5 kg load is 13%
Colour	Black	Black
Packaging	On reels 500 metres per reel 25 metres per reel	On reels 1000 metres per reel 25 metres per reel
NATO Part No.	4020-99-011-9481	4020-99-014-2488



The information and data is believed to be accurate at the time of printing. Our technical information should be carefully considered. The user must confirm suitability before adopting our products for commercial use. We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.