

Lacing Cord

Product Information




Vulcascot lacing cords are specifically designed for the lacing of cable forms.

The nylon braided core ensures high tensile strength with minor extensions but has sufficient elasticity under low loads to make a neat cable form.

The outer PVC sheath acts as a cushion preventing the cord from cutting into the cable insulation.

There is also a maximum limit on tensile strength to prevent excessive tension in lacing up.

The braiding core stops any possibility of the lacing cord unwinding under tension.

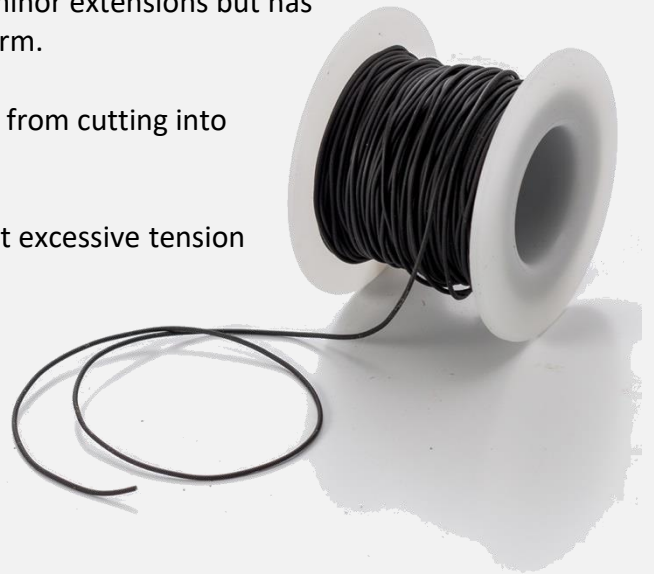

- **Tested to DEF STAN 40-8/3**
- **Operating Temperature: -70°C to +85°C**
- **Humidity class 5**
- **Properties maintained after more than 21 days of tropical testing**
- **Does not support mould growth**

Vulcascot Cable Protectors Limited

12 Norman-D-Gate, Bedford Road,
Northampton. NN1 5NT

Tel: 0800 0352842
Intl: +44 (0)1604 212973
Fax: +44 (0)1604 632344
Email: sales@vulcascot.co.uk
Web: www.vulcascot.co.uk

Technical Information

	VUL 173
Outside diameter	0.85mm +/-0.1mm
Working load	4.5 kg without breaking
Tensile strength	11 Kg
Extensibility	13% max
Colour	Black

Purchasing Information

	Reel Size	Part No.	EAN	NATO Part No.
VUL173	1000M	26403020	5060429032124	4020-99-014-2488
VUL173	25M	26403025	5060429032131	4020-99-014-2488



The information and data is believed to be accurate at the time of printing. Our technical information should be carefully considered. As conditions and methods used are beyond our control, the user must confirm suitability before adopting our products for commercial use. We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.

